



KSi201

Li-ion Ride-on Double-deck Stacker 2.0T

- Ergonomic design for comfortable operation
- Lithium technology with productivity improved
- Compact size delivering maneuverability
- Market-proven components with durability
- Heavy duty Li-Ion battery double stacker for long distance applications
- Double lifting allows to move 2 pallets at the time and to easily drive on ramps and uneven floor
- Great ergonomic design with height-adjustable tiller, suspended operator's platform and padded backrest
- High travelling speed and gradeability
- Powerful AC vertical traction motor
- Automatic speed reduction on turns
- Fast charging with integrated charger

LI-ION
TECHNOLOGY


EP EQUIPMENT CO.,LTD
www.ep-eq.eu



FEATURE

■ Ergonomic design for comfortable operation

For high-traffic workplaces, KSi201 creates a secure and comfortable compartment for the operator. The truck comes with a protective steel shell to prevent the operator from collisions. With ergonomics in mind, KSi201 makes operation comfort a priority with its adjustable tiller head, the handrail, the backrest and the vibration-free platform.

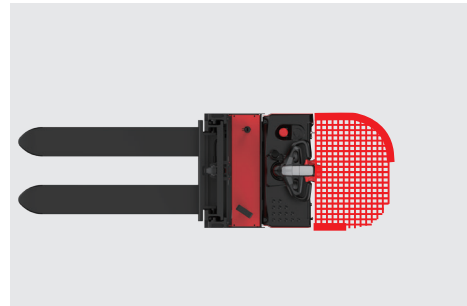

■ Lithium technology with productivity improved

KSi201 twins a maintenance-free 24V/205Ah Li-ion battery with a 24V/30A integrated charger as standard to maximize uptime thanks to opportunity and flexible charging. 24V/100A external charger is available as an option and delivers 2-hour fast charging to increase efficiency.



■ Compact size delivering maneuverability

KSi201 demonstrates a compact size resulting in a tight turning radius, making the truck perfect for handling tasks in narrow aisles.



Turning Radius 2236mm

■ Market-proven components with durability

KSi201 totally inherits the design philosophy of KPL201 with market-proven parts, mature drive unit and speed up to 10km/h and operators benefit from the truck in terms of productivity, control and durability. Plus, this helps dealers to achieve better parts stock management and reduce parts inventory.




Li-ion Ride-on Double-deck Stacker 2.0T

KSi201

Distinguishing mark	1.1	Manufacturer			EP
	1.2	Model designation			KSi201
	1.3	Drive			Electric
	1.4	Operator type			Standing
	1.5	Load capacity	Q	kg	2000
	1.5.1	Load capacity, load with mast lift	Q	kg	1000
	1.5.2	Load capacity, load with support arm lift	Q	kg	2000
	1.6	Load center distance	c	mm	600
	1.8	Load distance, centre of drive axle to fork	x	mm	926
Service weight	1.9	Wheelbase	y	mm	1550
	2.1	Service weight		kg	920
	2.2	Axle loading, laden front/rear		kg	990/1930
Tyres/chassis	2.3	Axle loading, unladen front/rear		kg	680/240
	3.1	Tyre type			Polyurethane
	3.2.1	Tyre size, front		mm	230×75
	3.3.1	Tyre size, rear		mm	85×70
	3.4	Additional wheels (castor wheels)		mm	130×55
	3.5	Wheels, number front/rear (x=drive wheels)		mm	1x,2/4
	3.6.1	Tread width, front	b10	mm	514
	3.7.1	Tread width, rear	b11	mm	385
	Dimensions	4.0	Max. Lift Height	H	mm
4.2		Retracted mast height	h1	mm	1316
4.3		Free lift	h2	mm	100
4.4		Lift height	h3	mm	1600
4.5		Height, mast extended	h4	mm	2112
4.6		Initial lift	h5	mm	120
4.9		Height of tiller handle in drive position min./max.	h14	mm	1190/1290
4.10		Height of wheel arms	h8	mm	—
4.15		Lowered height	h13	mm	92
4.19		Overall length	l1	mm	2456
4.20		Length to face of forks	l2	mm	1306
4.21		Overall width	b1/b2	mm	734
4.22		Fork dimensions	s/e/l	mm	55×185×1150
4.24		Fork carriage width	b3	mm	—
4.25		Distance between fork-arms	b5	mm	570
4.26		Distance between wheel arms/loading surfaces	b4	mm	—
Performance data		4.31	Ground clearance, laden, below mast	m1	mm
	4.32	Ground clearance, center of wheelbase	m2	mm	16
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	3026
	4.34.2	Aisle width for pallets 800×1200 crossways	Ast	mm	2920
	4.35	Turning radius	Wa	mm	2236
	5.1	Travel speed, laden/unladen		km/h	8.5/10
	5.2	Lifting speed, laden/unladen		m/s	0.18/0.23
	5.3	Lowering speed, laden/unladen		m/s	0.36/0.18
	5.8	Max. gradeability, laden/unladen		%	8/16
	5.10	Service brake			Electromagnetic
Electric-engine	6.1	Drive motor rating S2 60 min		kW	2.5
	6.2	Lift motor rating at S3 15%		kW	3
	6.4	Battery voltage/nominal capacity		V/Ah	24/205
	6.5	Battery weight		kg	70
Addition data	8.1	Type of drive control			AC
	10.5	Steering design			Electronic
	10.7	Sound pressure level at the driver's ear		dB(A)	74

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

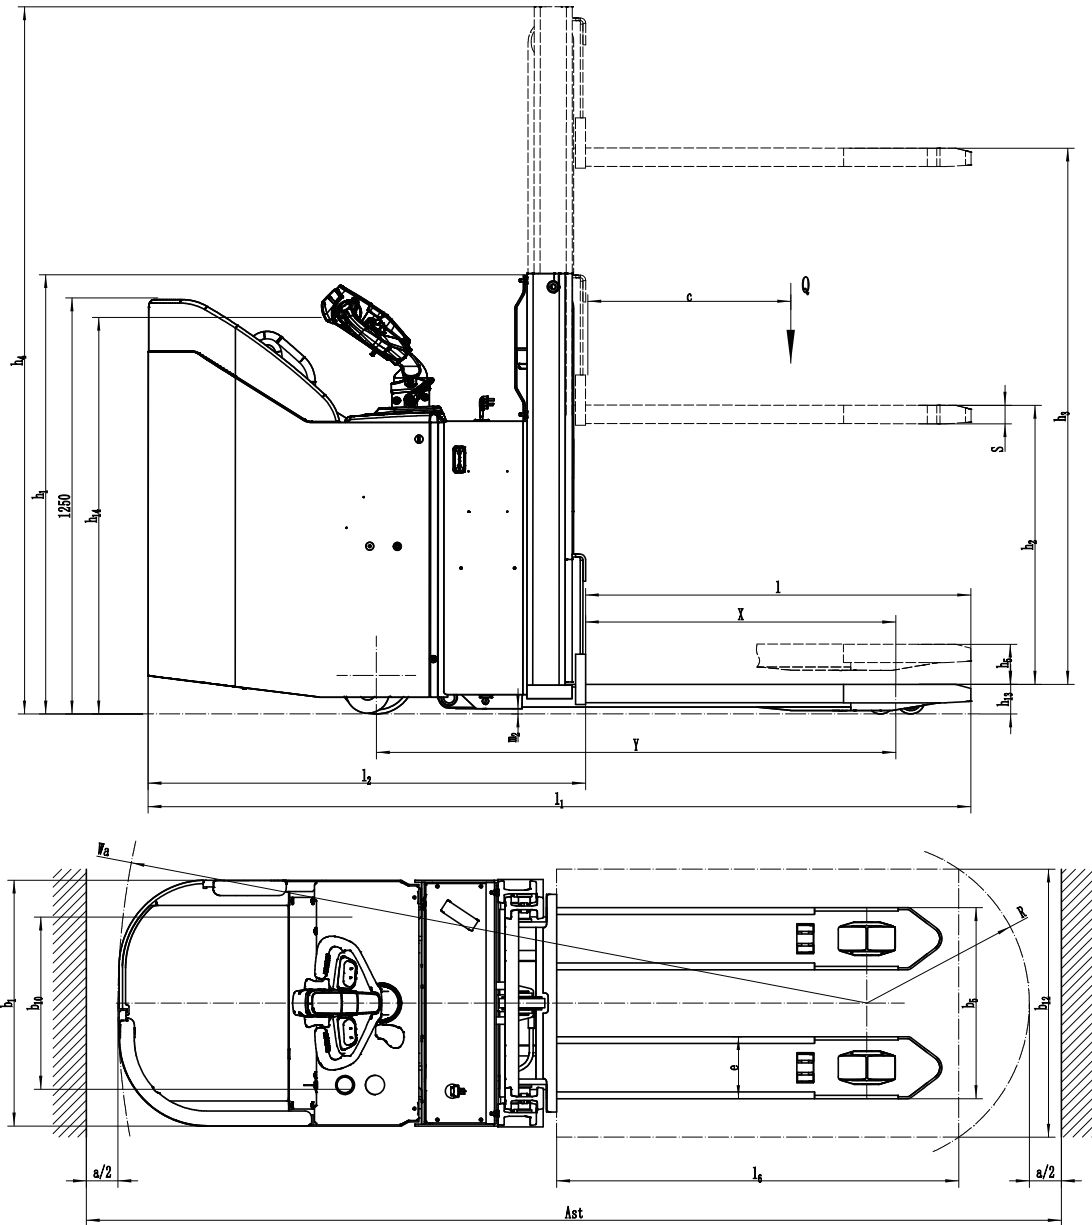

Option

No.	Optional items	KSI201
1.1	Fork dimension	●570*1150
1.3	Fork lowered height	●92
1.4	Fork carriage width	●650mm
2.1	Load wheel type	●Double○Single
2.2	Load wheel material	●PU
2.3	Drive wheel material	●PU○Trace PU○Rubber
2.7	Battery capacity	●205Ah
2.8	Charger	●24V-30A Internal○24V-100A External
2.9	Battery indicator	●With time
3.3	Castor wheels	●Yes and not customized
3.6	Rear lamp	●No○LED
3.12	Buzzer	●Yes and not customized
4.5	Proportional lift system	●Yes and not customized

Note: ●Standard ○ Optional - Inconformity

WAELLER sp. z o.o. sp. k.

PL 83-034 Trąbki Wielkie, ul. Towarowa 1 • PL 80-457 Gdańsk, ul. Powstańców Wielkopolskich 11
Tel. (+48) 58 683 01 53, 58 691 27 15, 784 046 763, 601 642 339

biuro@ep-eq.pl • www.ep-eq.pl